

KSR 3 SERIES

KSR-304P

World's Best Company in Digital Video Recording
Kodicom provides high quality display pictures with outstanding recording speed.



Main Functions

REAL TIME MONITORING
Simultaneous live images



COMPACT PICTURE STORAGE
Images are compressed to an average file size between 2-10Kb per picture using MPEG4 Algorithm

EASY PICTURE RETRIEVAL
Instant picture retrieval by date /time and camera number



EVENT CONTROLLED RECORDING
Reduces the amount of data and automatically records specific events



PICTURE TRANSMISSION OVER NETWORK
High quality picture transmission over PSTN, ISDN & LAN network

Digital Video Recorder(Non-PC based)

KSR-304P

Hot

Front/ Rear View


Front



Rear



External Specification

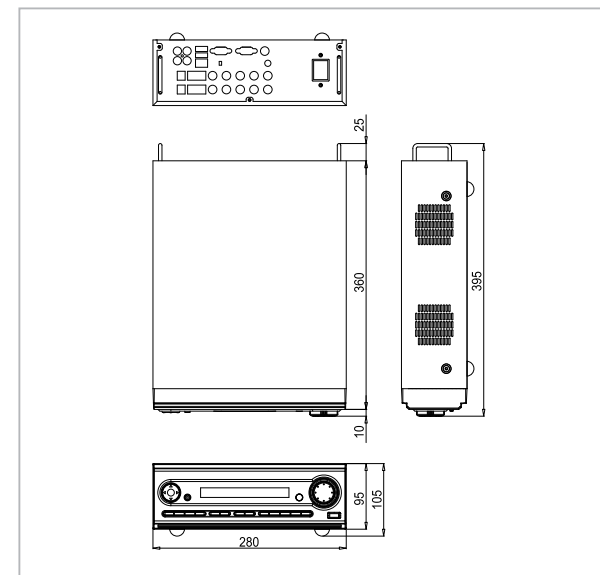

Functions by Screen



WATCH SCREEN

PTZ SCREEN

SEARCH SCREEN

Application

Some recommended installation areas are Securities Companies, Change Booths, Casinos, Pawnshops, Jewelers, Galleries, Exhibition Halls, Department Stores, Convenience Stores, Discount Offices, Hospital, Police Stations, Subway Stations, Airports, Banks etc.

Features

- High Quality Realtime Display – Max. 120fps(NTSC) 100fps(PAL)
- High Quality and High Speed Recording – Max. 120fps(NTSC) 100(PAL)
- Various Resolutions on Display and Recording – 704×480, 704×240, 352×240(NTSC), 704×576, 704×288, 352×288(PAL)
- MPEG4
- 1, 4 Division
- Kodicom, Pelco, Dennard, Bosch, Samsung and many more PTZ protocol included
- Watermark Function
- Remote Observation Through Network
- Emergency Screen Auto Transfer to Center Software
- User friendly Graphic User Interface
- Watchdog Function
- Mouse control supports

Specifications

Model		KSR-304P
Display	Speed	NTSC : 120fps PAL : 100fps
	Screen Division	1, 4 Division
Recording	Max. Speed (@CIF)	NTSC : 120fps PAL : 100fps
	Resolution	NTSC : 704×480, 704×240, 352×240 PAL : 704×576, 704×288, 352×288
	Recording Option	Continuous, Motion, Sensor, Pre-Alarm
Video	Format	NTSC/PAL
	CODEC	MPEG4
	Input	4 Ports
Audio	Output	CVBS, Spot out (1ch quad), VGA, S-Video
	CODEC	ADPCM
Alarm	Input	4 Ports
	Output	4 Ports
Network	Transmission	Ethernet (RJ45), PSTN (optional)
	Protocol	TCP/IP (support dynamic IP)
Backup	Device	USB, Network, CD-RW, DVD-RW(Optional)
Other Function	Remote Control	Remote Software (CMS)
	Remote Alarm	E-mail, CMS report
	PTZ	RS232C/485
	Watch Dog Function	Yes
	Image Authentication	Watermark
	Language	10 Languages
	Password	Multi-Level User Password Authorization
	USB	3 Ports (USB2.0)
Working Temperature	0°C ~ +40°C	
Power Source	AC 100 ~ 240V, 50/60Hz	
Dimensions	280mm(W) × 95mm(H) × 370mm(D)	
Weight (net)	5Kg (11lbs)	

*Specifications subject to change without notice.