








# KSR 6 SERIES

## KSR-608

World's Best Company in Digital Video Recording  
Kodicom provides high quality display pictures with outstanding recording speed.



### Main Functions

- 
**REAL TIME MONITORING**  
Simultaneous live images
- 
**COMPACT PICTURE STORAGE**  
Images are compressed to an average file size between 2-10Kb per picture using MPEG4 Algorithm
- 
**EASY PICTURE RETRIEVAL**  
Instant picture retrieval by date /time and camera number
- 
**EVENT CONTROLLED RECORDING**  
Reduces the amount of data and automatically records specific events
- 
**REMOTE CONTROL**  
Remote Control of PTZ cameras & other electronic devices
- 
**PICTURE TRANSMISSION OVER NETWORK**  
High quality picture transmission over PSTN, ISDN & LAN network
- 
**MULTI SCREEN MONITORING**  
1, 4, 9 Split Screen available

Digital Video Recorder(Non-PC based)

# KSR-608 Hot


### Front/ Rear View



### Features

- High Quality Realtime Display – Max. 240fps(NTSC) 200fps(PAL)
- High Quality and High Speed Recording – Max. 120fps(NTSC) 100(PAL)
- Various Resolutions on Display and Recording – 704×480, 704×240, 352×240(NTSC), 704×576, 704×288, 352×288(PAL)
- MPEG4
- 1, 4, 9 Division
- Kodicom, Pelco, Dennard, Bosch, Samsung and many more PTZ protocol included
- Watermark Function
- Remote Observation Through Network
- Emergency Screen Auto Transfer to Center Software
- User friendly Graphic User Interface
- Watchdog Function
- Mouse control supports

### External Specification

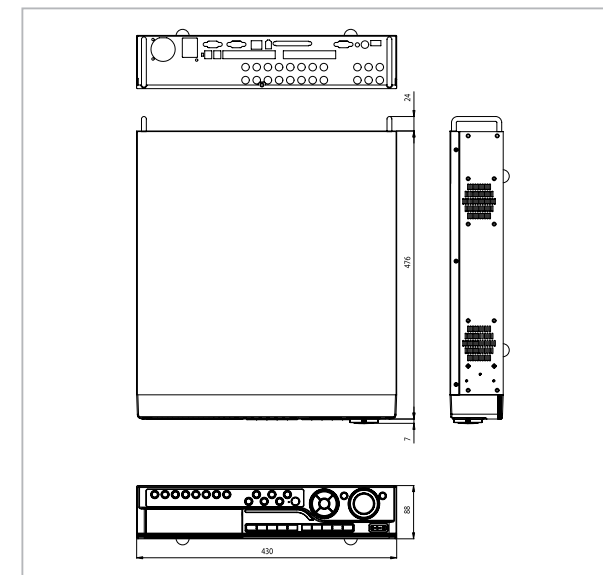


### Specifications

Model		KSR-608
Display	Speed	NTSC : 240fps PAL : 200fps
	Screen Division	1, 4, 9 Division
Recording	Max. Speed (@CIF)	NTSC : 120fps PAL : 100fps
	Resolution	NTSC : 704×480, 704×240, 352×240 PAL : 704×576, 704×288, 352×288
	Recording Option	Continuous, Motion, Sensor, Pre-Alarm
Video	Format	NTSC/PAL
	CODEC	MPEG4
	Input	8 Ports
Audio	Output	VGA, CVBS, S-Video, Programmable spot out (1ch quad, 2ch full)
	CODEC	ADPCM
Alarm	Input	8 Ports
	Output	8 Ports
Network	Transmission	Ethernet (RJ45), PSTN (optional)
	Protocol	TCP/IP (support dynamic IP)
Backup	Device	USB, Network, IEEE1394, CD/DVD-RW
Other Function	Remote Control	Remote Software (CMS)
	Remote Alarm	E-mail, CMS report
	PTZ	RS232C/485
	Watch Dog Function	Yes
	Image Authentication	Watermark
	Language	10 Languages
	Password	Multi-Level User Password Authorization
USB	2 Ports (USB2.0)	
Working Temperature		0°C ~ +40°C
Power Source		AC 100 ~ 240V, 50/60Hz
Dimensions		430mm(W) × 88mm(H) × 483mm(D)
Weight (net)		10.5Kg (23.1lbs)

\*Specifications subject to change without notice.

### Functions by Screen

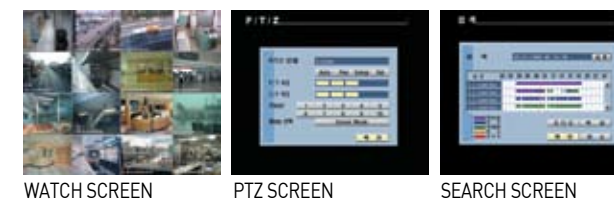

### Application

Some recommended installation areas are Securities Companies, Change Booths, Casinos, Pawnshops, Jewelers, Galleries, Exhibition Halls, Department Stores, Convenience Stores, Discount Offices, Hospital, Police Stations, Subway Stations, Airports, Banks etc.